




PRODORAL[®]H

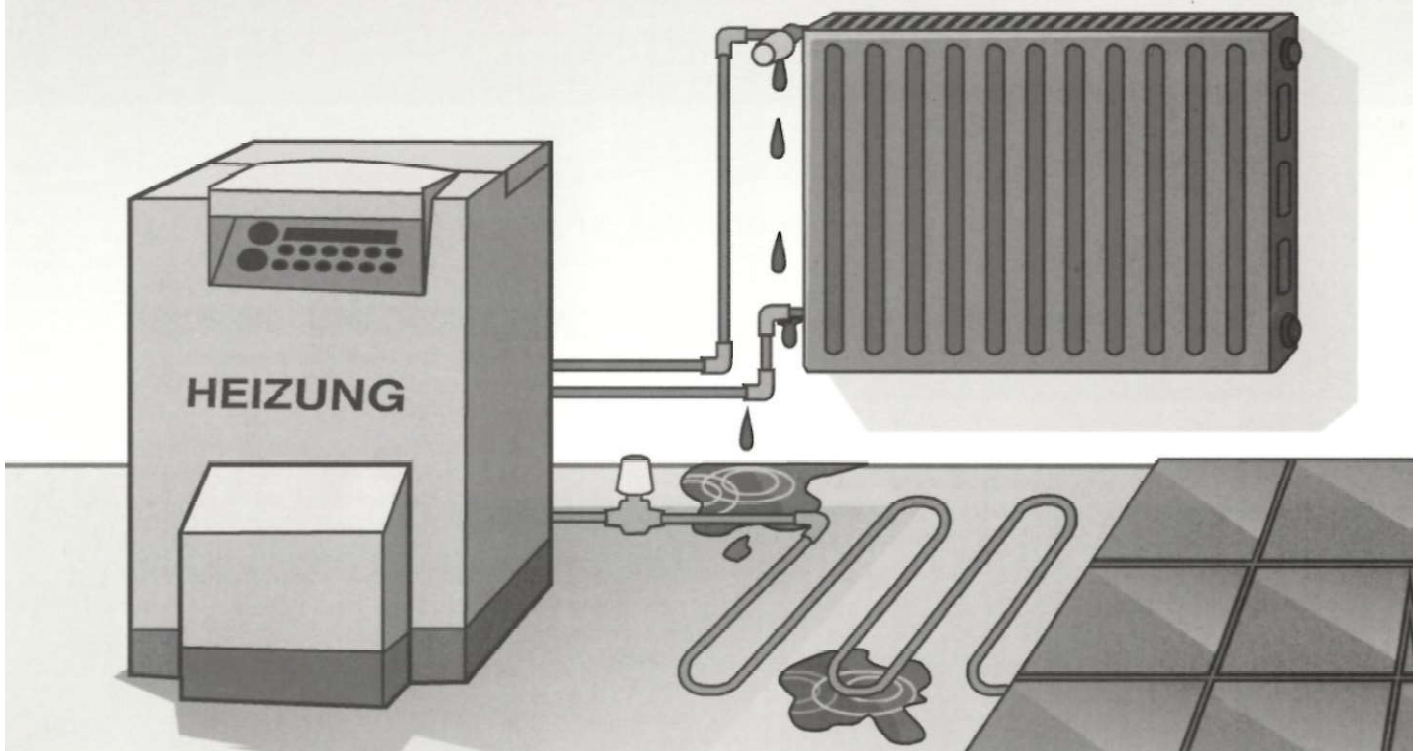

Sealant for Heating Systems

Safe

Cost effective

Quickly applied

Environmentally friendly



PRODORAL® H – the ideal sealant for heating systems

Seals leakages in pipes, boilers and radiators. PRODORAL® H may be applied to both metal and plastic pipes. Sealing with PRODORAL® H provides a durable temperature and pressure resistant system.

Instruction for Use

Heating system must be in operation, with all radiator valves open and filters removed.

Find out the approximate interior volume of the piping system to determine the quantity of sealant required.

PRODORAL® H may be filled into the heating system using an ordinary hand pump.

Shake well and pour PRODORAL® H into the tank of the pump.

Connect the pump to the filling valve of the heating system and fill in with sealant. Bleed all circulation pumps of the system to avoid obstruction.

By means of circulation, the sealant is spread within the system and gets into all of the leaks.

Allow the heating system to operate for at least 12 hours with the radiator valves open.

The sealing occurs within a few days.

PRODORAL® H may remain in the heating system and will repair future leakages.

Mixing Ratio

Leakage rate up to 50 l/24 h Mixing ratio approx. 1:200

Leakage rate between 50 l/24 h und 400 l/24h Mixing ratio approx. 1:100

Special advice

Heating system must not contain frost and corrosion protection agents. In such cases, please empty, rinse and replenish the system.

With PRODORAL® H contaminated objects such as tools, tiles, washbasin, etc. – rinse immediately with plenty of water. After curing of the sealant, stains are not removable.

Health and safety

PRODORAL® H is non-flammable and will not emit toxic vapours. In case of contact with eyes and skin, rinse immediately with plenty of water. By contact with eyes, please seek medical advice.

When using PRODORAL® H, wearing safety goggles and gloves must be observed. Keep PRODORAL® H out of reach of children.

Storage life

2 Years in original closed canister.

Storage

Store frost-free. No hazard classification acc. to VbF.

TIB Chemicals AG
Mülheimer Straße 16-22 | 68219 Mannheim
Postfach 81 02 20 | 68202 Mannheim
Telefon +49 621 8901-0 | Fax +49 621 8901-900
www.tib-chemicals.com



Ansprechpartner:
Hans-Jürgen Serbser
Vertrieb Beschichtungssysteme
Telefon +49 8901-831 | Fax +49 621 8901-902
hans-juergen.serbser@tib-chemicals.com

Stand: 06/2017